



TOUCH II

User friendly and totally programmable 7" USB Connection. Online platform free of charge for programming, telemetry, data analysis...thanks to the IoT
Videos on display (ads, instructions, etc.)
37 languages
8 dosing signals as standard



G FACTOR

High G-Factor:
G-FACTOR 500 for high spin washers



EFFICIENCY

Intelligent consumption
Optimal loading
Water Recovery tanks ready: ECOTANK
Low water consumption



VERSATILITY

Make to order: customisation
OPL < > COIN
Electric < > Hot water
Drain valve < > Pump
Wet cleaning features



CONNECTIVITY

IoT - Domus Connect standard.
Remote technical service
Management of laundries: OPL and COIN
Remote payment



ERGONOMICS

Biggest door diameters: Ø373
Easy opening/closing system for door lock



MAINTENANCE

Hinged control panel: easy and ergonomic access
Technical menu: statistics for technicians and maintenance with external console (with console option)



OTHERS

Grey skinplate outer casing
Drum and tub in stainless steel AISI 304
Detergent dispenser with 4 compartments
Electronic control of imbalance with frequency control
LOADING AID feature: water and rotation control
CB and WRAS approved product. Option ETL
High spin washers with suspended drum.




OPTIONS

- DQ-2 Dosing pump kit
- Extra dosing pump DB-1
- Double drain
- External double drain 3" (recommended for DHS-11)
- Drain pump for models DHS-11 and DHS-14
- Normally closed valve
- Water RE-CYCLE: recirculation of bath water
- Levelling feet
- Auto Weight: automatic weighing sensor system on feet (Includes kit with 6 extra dosing signals)
- Relay card with 6 extra dosing signals: up to 14 signals
- Silicone gasket
- Reversible door opening
- Tropicalized model: protected board
- Steam kit to transform an E or HW heated machine into steam version
- Plinth for mops with drawer inox/skinplate
- Plinth to level all machines from top
- Plinth to align the doorbase at 850mm
- Stainless steel AISI 304 outer casing
- Stainless steel AISI 304 front panel
- Maritime volt. electric models: 440V III 50/60 (Hz no N)
- Coin/token kits
- Auto unlock kit for the door.

TECHNICAL DATA	UNIT.	DHS - 11 TOUCH II		DHS - 14 TOUCH II	
DRUM					
Load capacity 1:9 / 1:10	Kg	11/10		14/13	
Volume	l	100		130	
Diameter	mm	532		620	
Depth	mm	425		430	
GENERAL DETAILS					
Washing speed / Spining speed	r.p.m.	50/1.300		50/1.204	
G Factor	-	500		500	
Maximum force transmitted	KN	2,08 ±0,75		2,49 ±1,05	
Frequency-dynamic force	Hz	16,7		16,7	
Noise level	dB	< 70		< 70	
Coin laundry version	-	Yes		Yes	
Double drain	-	No		Opt	
Weighing System / Tilting System	-	Opt / No		Opt / No	
SLUICE option	-	No		No	
DOOR					
Height center door / Height door	mm	630/370		700 / 440	
Diameter	mm	373		373	
POWER					
Motor	kW	0,75		1,1	
Electric heating power	kW	6		9	
Total electric power (electric model)	kW	6,25		9,4	
Total electric power (hw, steam model)	kW	0,75		1,1	
CONNECTIONS					
		ELECTRIC		STEAM - HOT WATER	
Tension 230V - I + N + T	Nº x mm2 / A	2x6+T - 40A	2x1,5+T - 16A	2x10+T - 50A	2x1,5+T - 16A
Tension 230V - III + T	Nº x mm2 / A	3x2,5+T - 20A	-	3x2,5+T - 20A	-
Tension 400V - III + N + T	Nº x mm2 / A	4x1,5+T - 16A	-	4x1,5+T - 16A	-
Steam inlet (Steam model) inch	inch	1/2"		1/2"	
Maximum steam consumption (Steam model)	Kg/h	7		8,5	
Water inlet inch	inch	3/4"		3/4"	
Water main pressure	Kgs/cm2	2-4		2-4	
Maximum water consumption*	Lit/h	71,4*		88,8*	
Drain inch	inch	3"		3"	
Drainage capacity	Lit/min	200		200	
DIMENSIONS / PACKING DIMENSIONS					
Net Width / Gross Width	mm	692 / 730		788 / 830	
Net Depth / Gross Depth	mm	788 / 1.000		869 / 1.010	
Net Height / Gross Height	mm	1.185 / 1.417		1.307 / 1.560	
Net weight / Gross weight	kg	230 / 239		250 / 283	
Volume	m3	1,03		1,31	

* Program nº20, 75% load

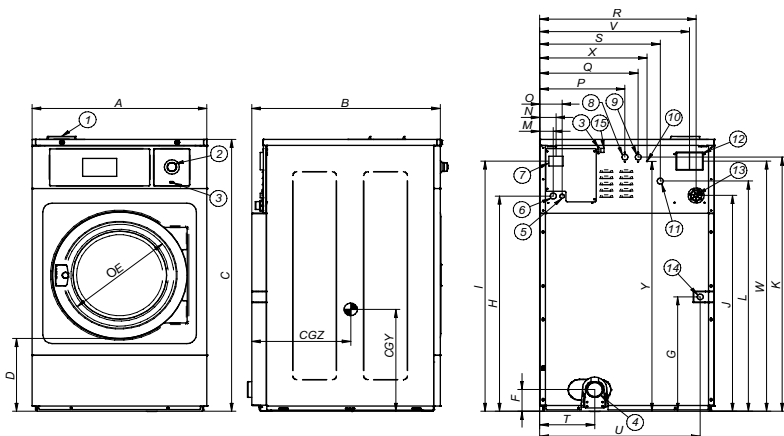

1. SOAP DISPENSER
2. EMERGENCY STOP
3. USB PORT
4. DRAIN
5. ELECTRIC CONNECTION TO LIQUID SOAP PUMPS
6. ELECTRICAL CONNECTION
7. MAIN SWITCH
8. AUXILIAR WATER INLET
9. HOT WATER INLET
10. EQUIPOTENTIAL CONNECTION
11. COLD WATER INLET
12. BLUR OUTPUT / WATER OVERLOAD
13. LIQUID SOAP CONNECTION
14. STEAM CONNECTION
15. ETHERNET PORT

	A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P	Q	R	S	T	U	V	W	X	Y	CGY	CGZ	
DHS-11	mm	692	788	1.185	370	373	125	354	913	1.085	916	1.100	985	61	74	101	292	352	610	448	226	626	580	1.080	442	1.145	424	577
DHS-14	mm	788	869	1.307	440	373	243	385	1.034	1.202	1.037	1.221	1.106	61	74	101	385	445	706	544	243	718	676	1.202	485	1.201	450	651